

AXES Unmanaged Series(5/6/8 Port)

Rugged Design Industrial 5 port /6 port/8 port 10/100 Ethernet switch

9-56VDC Dual Power input, Operating temp: -40°C to +85°C



AXES Unmanaged 10/100M Ethernet Switch

Introduction


This rugged designed Industrial 5/6/8 port Fast Ethernet Switch is equipped with our high efficiency ColdDesign technology which not only meet IEEE standard, also reduce the excessive heat problem to a minimum. And it is also equipped with optional 2 ports 100M fiber that can be used as fiber redundancy, cascaded to your other devices to expand your network application. It is being rigorously tested for your Security, Transportation and Telco application.

Specification

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3u 100Base-FX Fast Ethernet IEEE802.3x Flow Control and Back Pressure
Switch Architecture	Back-plane (Switching Fabric): 1.0Gbps
Data Processing	Store and Forward
Flow Control:	IEEE 802.3x Flow Control and Back Pressure
MAC address Table Size	1K
Packet Buffer Size	1M
Network Connector :	AXES-005 - 5xRJ-45 10/100BaseT(X) AXES-006 - 6xRJ-45 10/100BaseT(X) AXES-401 - 4xRJ-45 10/100BaseT(X), 1x 100Fx(SC) AXES-402 - 4xRJ-45 10/100BaseT(X), 2x 100Fx(SC) AXES-501 - 5xRJ-45 10/100BaseT(X), 1x 100Fx(SC)
Network Cable	UTP/STP above Cat.5e Cable
	EIA/TIA-568 10-ohm (100m)
	Fiber Cable (Multi-mode):50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um
Protocol	CSMA/CD
LED	PW1(Power 1) Green, PW2(Power 2) Green, ERR(Fault) Amber,
	TX/RJ-45 port: LNK (Link/Active) Green, Flash TX/RX data
	Fiber Per port LED Link (Green) Active Flash
Reserve polarity protection	Present
Overload current protection	Present
Power Supply	Redundant Dual DC 9V-56V Power Input
Power Consumption	3.76W@48 VDC full load
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, Relay in short circuit mode when 2 powers are connected. in open circuit mode when only one power supply is connected

Removable Terminal Block	Provide 2 Redundant power , Alarm relay contact ,6 Pin Wire range: 0.34mm ² to 2.5mm ² Solid wire (AWG):12-24/14-22 Stranded wire(AWG): 12-24/14-22 Torque:5lb-In/0.5Nm/0.56Nm Wire Strip length: 7-8mm
Operating Temperature	-40°C~85°C fully tested.
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40°C~105°C
MTBF (mean time between failure)	510,304 hrs (MIL-HDBK-217F) at 25°C
Housing	Rugged Metal ,IP30 Protection
Case Dimension (L x W x D)	142mmx36.2mmx105mm (LxWxD)
Installation mounting	DIN Rail mounting and Wall Mounting
Certificates:	
EN55022/24	ITE equipment
EN50155	Railways Applications Electronic Equipment used on Rolling Stock
EN55011	Industrial, Scientific and Medical (ISM) equipment
EN50121-3-2	Railway Applications – Electromagnetic Compatibility – Part 3-2 Rolling Stock - Apparatus
EN50121-4	Railway Applications – Electromagnetic Compatibility – Part4 Emissions and Immunity of the Signaling and Telecommunications Apparatus
Safety	IEC EN60950-1
EMC/EMS	CE, FCC, VCCI
EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A
EN 50155 / EN 60068-2-6	Vibration
EN 50155 / EN 60068-2-27	Shock
EN 50155 / EN 60068-2-32	Free Fall

Housing Dimension

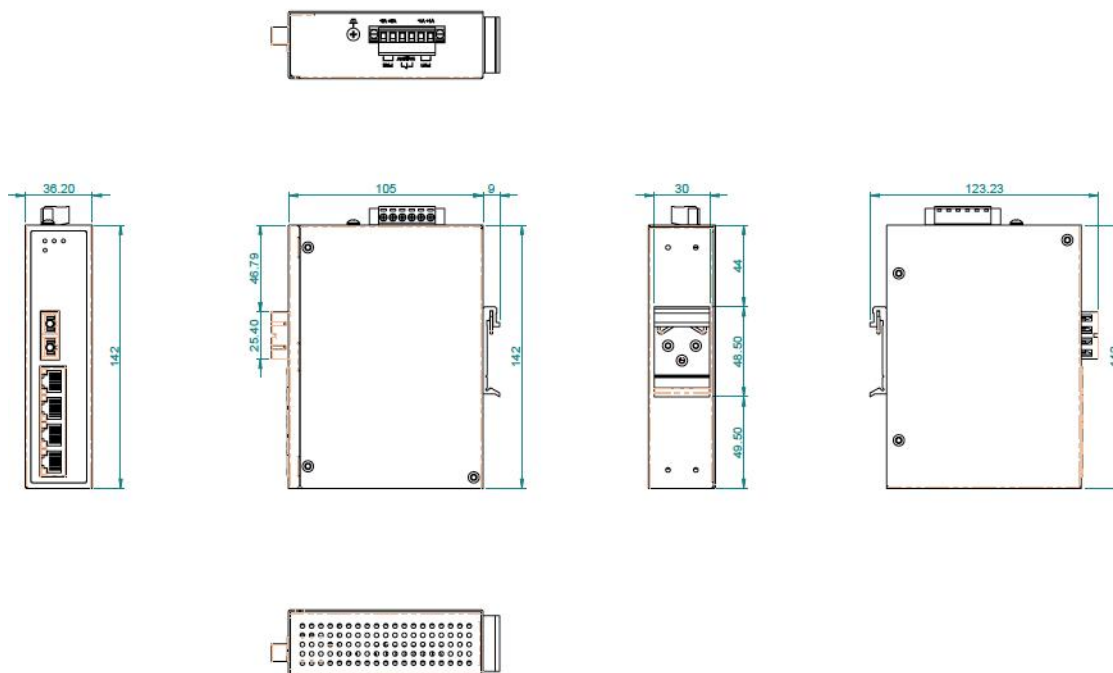

Ordering Information

AXES-005	5X RJ45 10/100 Tx
AXES-006	6X RJ45 10/100 Tx
AXES-008	8X RJ45 10/100 Tx
AXES-401-S-SC	4xRJ-45 10/100BaseT(X), 1x 100Fx,Single mode,30KM,Sc connector
AXES-401-M-SC	4xRJ-45 10/100BaseT(X), 1x 100Fx,Multi mode,2KM,Sc connector
AXES-402-SS-SC	4xRJ-45 10/100BaseT(X), 2x 100Fx,Single mode,30KM,Sc connector
AXES-402-MM-SC	4xRJ-45 10/100BaseT(X), 2x 100Fx,Multi mode,2KM,Sc connector
AXES-501-S-SC	5xRJ-45 10/100BaseT(X), 1x 100Fx,Single mode,30KM,Sc connector
AXES-501-M-SC	5xRJ-45 10/100BaseT(X), 1x 100Fx,Multi mode,2KM,Sc connector

Optional Accessories :

AXDR-75-12	industrial grade 110/220VAC to 12VDC power supply,75 watt o/p
AXDR-75-24	industrial grade 110/220VAC to 24VDC power supply,75 watt o/p
Pat-5M-M-SC	5 meter multimode SC fiber patch cord,simplex, SC/PC
Pat-5M-S-SC	5 meter singlemode SC fiber patch cord,simplex, SC/PC